

## 2-spoke handwheels, powder coated aluminum, with revolving cylindrical grip

Item description/product images



### Description

#### Material:

Handwheels aluminum.

Cylinder grip black thermoset PF 31-DIN 7708, center pin electro zinc-plated steel.

#### Version:


Black, powder-coated.

Wheel rim turned.

#### On request:

Hubs with square socket.

### Drawings

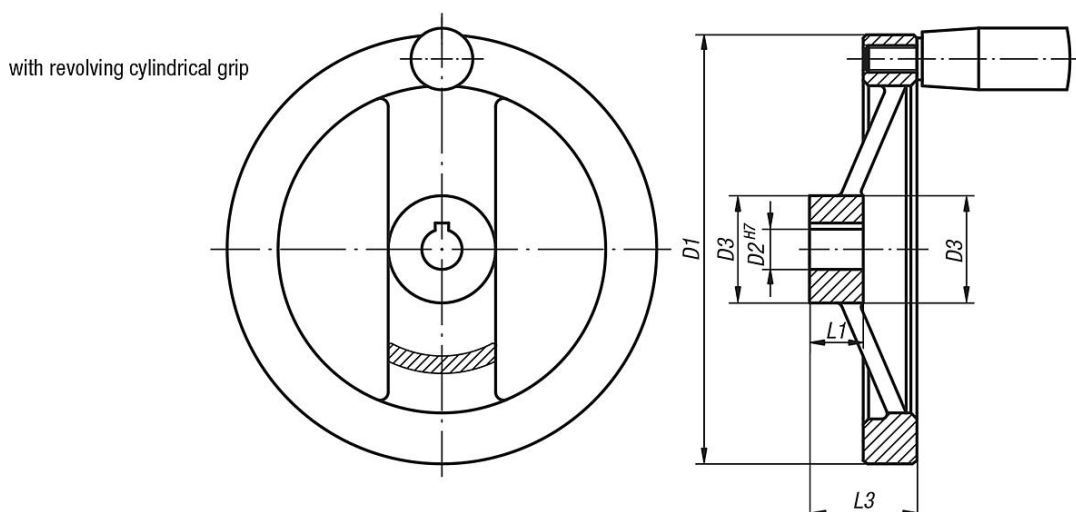

| Order No.      | Version 1             | D1  | D2   | D3 | L1 | L3   | B3 | T    | Revolving cylinder grip |
|----------------|-----------------------|-----|------|----|----|------|----|------|-------------------------|
| K0162.41080X10 | reamed hole           | 80  | 10H7 | 24 | 16 | 28   | -  | -    | ø18 x M6 x 40           |
| K0162.41080X12 | reamed hole           | 80  | 12H7 | 24 | 16 | 28   | -  | -    | ø18 x M6 x 40           |
| K0162.41100X10 | reamed hole           | 100 | 10H7 | 26 | 17 | 33   | -  | -    | ø18 x M6 x 40           |
| K0162.41100X12 | reamed hole           | 100 | 12H7 | 26 | 17 | 33   | -  | -    | ø18 x M6 x 40           |
| K0162.41125X12 | reamed hole           | 125 | 12H7 | 31 | 18 | 33,5 | -  | -    | ø22 x M8 x 56           |
| K0162.41125X14 | reamed hole           | 125 | 14H7 | 31 | 18 | 33,5 | -  | -    | ø22 x M8 x 56           |
| K0162.41160X14 | reamed hole           | 160 | 14H7 | 40 | 20 | 39   | -  | -    | ø26 x M10 x 80          |
| K0162.41160X16 | reamed hole           | 160 | 16H7 | 40 | 20 | 39   | -  | -    | ø26 x M10 x 80          |
| K0162.41200X18 | reamed hole           | 200 | 18H7 | 42 | 24 | 45   | -  | -    | ø26 x M10 x 80          |
| K0162.41200X20 | reamed hole           | 200 | 20H7 | 42 | 24 | 45   | -  | -    | ø26 x M10 x 80          |
| K0162.41250X22 | reamed hole           | 250 | 22H7 | 48 | 28 | 51   | -  | -    | ø31 x M12 x 102         |
| K0162.41250X26 | reamed hole           | 250 | 26H7 | 48 | 28 | 51   | -  | -    | ø31 x M12 x 102         |
| K0162.51080X10 | reamed hole with slot | 80  | 10H7 | 24 | 16 | 28   | 3  | 11,4 | ø18 x M6 x 40           |
| K0162.51080X12 | reamed hole with slot | 80  | 12H7 | 24 | 16 | 28   | 4  | 13,8 | ø18 x M6 x 40           |
| K0162.51100X10 | reamed hole with slot | 100 | 10H7 | 26 | 17 | 33   | 3  | 11,4 | ø18 x M6 x 40           |
| K0162.51100X12 | reamed hole with slot | 100 | 12H7 | 26 | 17 | 33   | 4  | 13,8 | ø18 x M6 x 40           |

## 2-spoke handwheels, powder coated aluminum, with revolving cylindrical grip

| Order No.      | Version 1             | D1  | D2   | D3 | L1 | L3   | B3 | T    | Revolving cylinder grip |
|----------------|-----------------------|-----|------|----|----|------|----|------|-------------------------|
| K0162.51125X12 | reamed hole with slot | 125 | 12H7 | 31 | 18 | 33,5 | 4  | 13,8 | ø22 x M8 x 56           |
| K0162.51125X14 | reamed hole with slot | 125 | 14H7 | 31 | 18 | 33,5 | 5  | 16,3 | ø22 x M8 x 56           |
| K0162.51160X14 | reamed hole with slot | 160 | 14H7 | 40 | 20 | 39   | 5  | 16,3 | ø26 x M10 x 80          |
| K0162.51160X16 | reamed hole with slot | 160 | 16H7 | 40 | 20 | 39   | 5  | 18,3 | ø26 x M10 x 80          |
| K0162.51200X18 | reamed hole with slot | 200 | 18H7 | 42 | 24 | 45   | 6  | 20,8 | ø26 x M10 x 80          |
| K0162.51200X20 | reamed hole with slot | 200 | 20H7 | 42 | 24 | 45   | 6  | 22,8 | ø26 x M10 x 80          |
| K0162.51250X22 | reamed hole with slot | 250 | 22H7 | 48 | 28 | 51   | 6  | 24,8 | ø31 x M12 x 102         |
| K0162.51250X26 | reamed hole with slot | 250 | 26H7 | 48 | 28 | 51   | 8  | 29,3 | ø31 x M12 x 102         |