

Indexing plungers ECO, steel or stainless steel with plastic mushroom grip, thread lock and locking slot

Item description/product images



Description

Material:

Steel version:

Indexing pin not hardened:

Threaded sleeve 1.0718.

Indexing pin 1.4305.

Stainless steel version:

Indexing pin not hardened:

Threaded sleeve and indexing pin 1.4305.

Mushroom knob black gray thermoplastic.

Thread lock blue polyamide.

Version:

Steel version:

Indexing pin hardened.

Threaded body trivalent blue passivated.

Indexing pin bright.

Stainless steel version:

Indexing pin not hardened.


Steel parts bright.

On request:

Special versions and fine thread.

Indexing plungers ECO, steel or stainless steel with plastic mushroom grip, thread lock and locking slot

Drawings

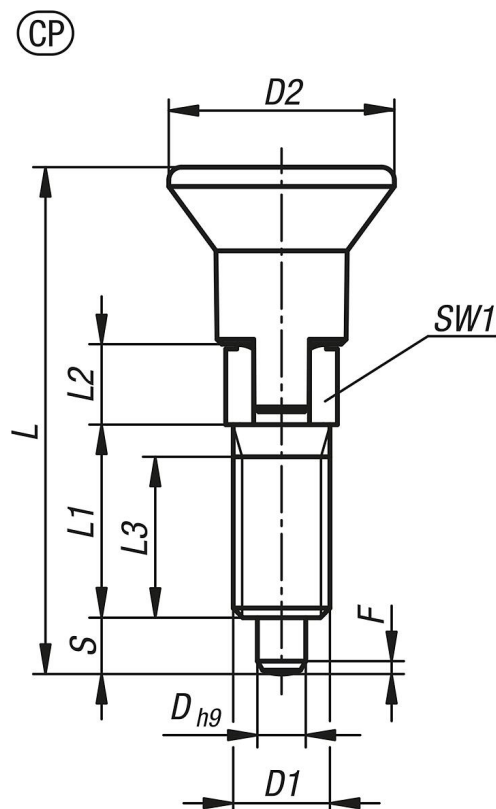

Order No.	Main material	style	D	D1	D2	L	L1	L2	L3	Travel S	SW1	Fx30°	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
K1098.093903060	steel	CP	3	M6	14	31,5	12	5	10	3,5	6	0,8	4	10
K1098.093004060	steel	CP	4	M6	14	36	15	6	13	4	6	1	6	12
K1098.093105080	steel	CP	5	M8	14	40	17	7	15	5	8	1,3	6	12
K1098.093206100	steel	CP	6	M10	18	47,5	20	8	17	6	10	1,8	8	15
K1098.093308120	steel	CP	8	M12	25	61,7	26	10	23	8	12	2,3	8	19
K1098.193903060	stainless steel	CP	3	M6	14	31,5	12	5	10	3,5	6	0,8	4	10
K1098.193004060	stainless steel	CP	4	M6	14	36	15	6	13	4	6	1	6	12
K1098.193105080	stainless steel	CP	5	M8	14	40	17	7	15	5	8	1,3	6	12
K1098.193206100	stainless steel	CP	6	M10	18	47,5	20	8	17	6	10	1,8	8	15
K1098.193308120	stainless steel	CP	8	M12	25	61,7	26	10	23	8	12	2,3	8	19