

Indexing plungers, steel or stainless steel, pneumatic

Item description/product images



Description

Material:

Steel version:

threaded body and thrust pin, free-cutting steel.
hexagon nuts, steel, grade 04.

Stainless steel version:

threaded body 1.4305
thrust pin 1.4034
hexagon nuts, A2 stainless steel.

Version:

Steel version:

threaded body, black oxidized
thrust pin hardened, black oxidized and ground
hexagon nuts, black oxidized

Stainless steel version:

threaded body, bright
thrust pin, hardened, ground and bright
hexagon nuts, bright

Note:

The indexing plungers are operated by applying compressed air.
The spring-loaded reset occurs by disconnecting the air supply.

Pneumatic cylinder:

Single-acting piston rod cylinder.

Materials:

cylinder tube, nickel-plated brass,
piston rod, stainless steel
seals, NBR, PU.


Operating medium:

filtered and dried air, oiled or not oiled.

Application temperature: -20 °C to +80 °C.

Indexing plungers, steel or stainless steel, pneumatic

Drawings

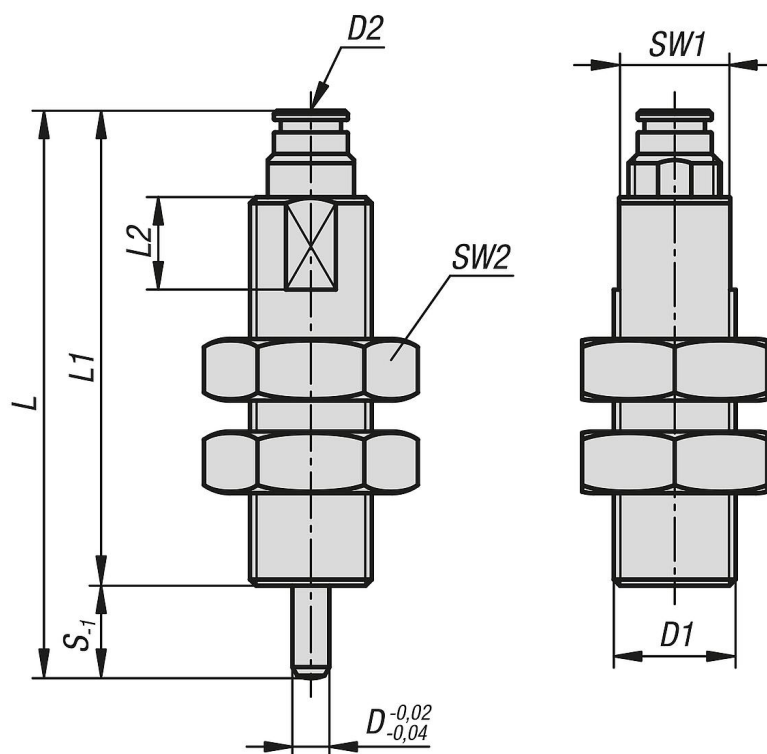

Indexing plungers, pneumatic

Order No.	Main material	D	D1	D2	L	L1	L2	Travel S	SW1	SW2	P=Operating pressure bar	F6=Piston force at 6 bar (N)	Spring retraction force ca. N
K1116.1308010	free-cutting steel	8	M20x1,5	M5	77	67	15	10	18	30	2 - 6	39,6-35,3	11,6-5,1
K1116.1206010	free-cutting steel	6	M20x1,5	M5	80	70	15	10	18	30	2 - 6	38,7-35,1	9,9-6
K1116.1308015	free-cutting steel	8	M20x1,5	M5	89	74	15	15	18	30	2 - 6	39,6-33,1	11,6-5,1
K1116.1206015	free-cutting steel	6	M20x1,5	M5	92	77	15	15	18	30	2 - 6	38,7-32,9	11,8-6
K1116.01308010	stainless steel	8	M20x1,5	M5	77	67	15	10	18	30	2 - 6	39,6-35,3	11,6-5,1
K1116.01206010	stainless steel	6	M20x1,5	M5	80	70	15	10	18	30	2 - 6	38,7-35,1	9,9-6
K1116.01308015	stainless steel	8	M20x1,5	M5	89	74	15	15	18	30	2 - 6	39,6-33,1	11,6-5,1
K1116.01206015	stainless steel	6	M20x1,5	M5	92	77	15	15	18	30	2 - 6	38,7-32,9	11,8-6