

Quarter-turn locks with L-grip, stainless steel 1.4401, lockable, housing diameter 32 mm

Item description/product images



Description

Material:

Stainless steel 1.4401.

Version:

Bright.

Grip polished.

Note:

Quarter-turn lock with L-grip. For right or left mounting with 90° closing. The quarter-turn lock can be installed pre-assembled. Rating IP65.

Please order required tongue version separately. Every tongue can be combined with this housing.

The lockable quarter-turn locks are each supplied with 2 keys. The cylinder locks have a single key system i.e. the same key works in all locks (cylinder lock 1333).

*Dimension A results from the combination of the quarter turn lock and the tongue and is specified with the matching tongues.

On request:


Available for door thickness 20 and 40 mm.

Accessory:

Key for quarter-turn lock K1511.

Tongue for stainless steel quarter-turn lock K1340.

Drawings

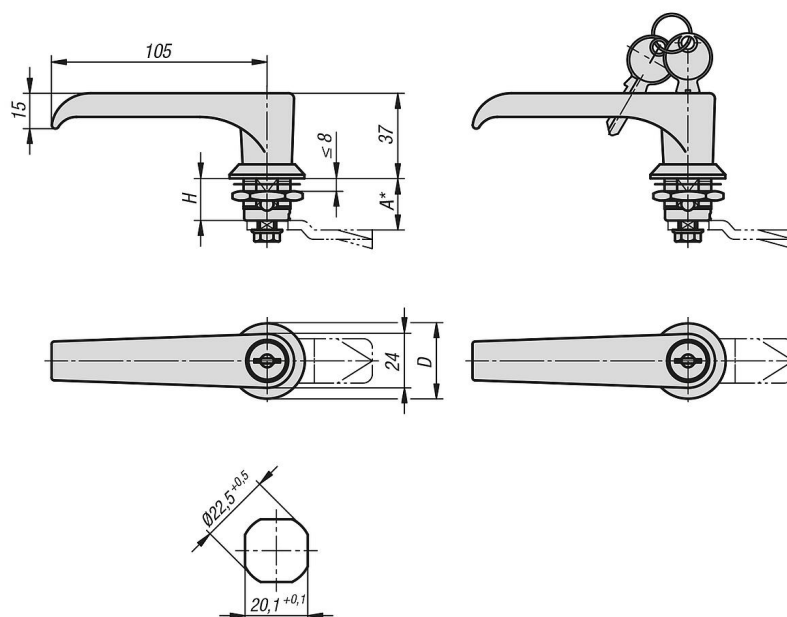

Quarter-turn locks with L-grip, stainless steel 1.4401, lockable, housing diameter 32 mm

Quarter-turn locks with L-grip, stainless steel 1.4401, lockable, housing diameter 32 mm

Order No.	Actuation	D	H
K1359.118	L-grip	32	18
K1359.218	L-grip lockable	32	18