

Adjustable handles, plastic, with internal thread and safety function, threaded insert blue passivated steel - inch

Item description/product images

INCH
Parts



press to
engage
(safety function)



Description

Product description:

Adjustable handles with safety function prevent changes in the locking point through accidental opening or closing.

In the default position, the handle can be freely rotated and has no connection to the clamping point. The grip handle only engages when pushed down and the clamp can be loosened or tightened.

A spring sets the handle automatically into the default position when released.

Material:

Grip lever and insert made from reinforced thermoplastic.

Bushing steel.

Version:

Steel trivalent blue passivated.

Benefits:

Protection against accidental opening or closing.


Closed grip contour without protruding edges.

On request:

Special versions.

Adjustable handles, plastic, with internal thread and safety function, threaded insert blue passivated steel - inch

Drawings

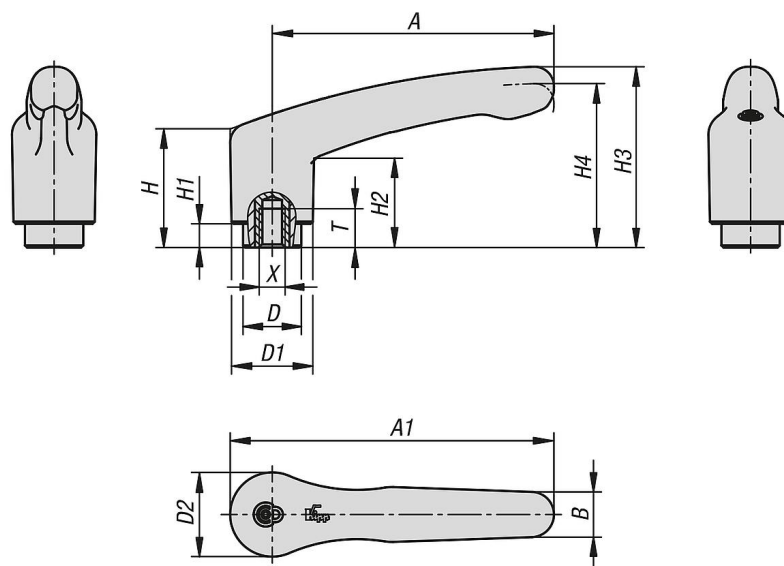

Order No.	Main color	Size	X	T	D	D1	D2	H	H1	H2	H3	H4	A	A1	B	No. of teeth
K1553.1AE1	black gray RAL 7021	1	8-32	6	10	13,2	13,8	22,7	5	15,2	31,8	28,9	39,9	46,8	7,9	12
K1553.1A11	black gray RAL 7021	1	10-32	6	10	13,2	13,8	22,7	5	15,2	31,8	28,9	39,9	46,8	7,9	12
K1553.2A11	black gray RAL 7021	2	10-32	8	13,5	18,8	19,5	27,4	5,5	20,7	41,9	38	65,2	75	10,5	12
K1553.2A21	black gray RAL 7021	2	1/4-20	8	13,5	18,8	19,5	27,4	5,5	20,7	41,9	38	65,2	75	10,5	12
K1553.2A31	black gray RAL 7021	2	5/16-18	9	13,5	18,8	19,5	27,4	5,5	20,7	41,9	38	65,2	75	10,5	12
K1553.3A31	black gray RAL 7021	3	5/16-18	14,5	17	21,2	22,2	40	10	31,4	58,1	53,3	80,3	91,3	11,7	12
K1553.3A41	black gray RAL 7021	3	3/8-16	14,5	17	21,2	22,2	40	10	31,4	58,1	53,3	80,3	91,3	11,7	12
K1553.1AE84	traffic red RAL 3020	1	8-32	6	10	13,2	13,8	22,7	5	15,2	31,8	28,9	39,9	46,8	7,9	12
K1553.1A184	traffic red RAL 3020	1	10-32	6	10	13,2	13,8	22,7	5	15,2	31,8	28,9	39,9	46,8	7,9	12
K1553.2A184	traffic red RAL 3020	2	10-32	8	13,5	18,8	19,5	27,4	5,5	20,7	41,9	38	65,2	75	10,5	12
K1553.2A284	traffic red RAL 3020	2	1/4-20	8	13,5	18,8	19,5	27,4	5,5	20,7	41,9	38	65,2	75	10,5	12
K1553.2A384	traffic red RAL 3020	2	5/16-18	9	13,5	18,8	19,5	27,4	5,5	20,7	41,9	38	65,2	75	10,5	12
K1553.3A384	traffic red RAL 3020	3	5/16-18	14,5	17	21,2	22,2	40	10	31,4	58,1	53,3	80,3	91,3	11,7	12
K1553.3A484	traffic red RAL 3020	3	3/8-16	14,5	17	21,2	22,2	40	10	31,4	58,1	53,3	80,3	91,3	11,7	12