

Axial joints for tractive forces adjustable, Style B

Item description/product images



Description

Material:

Steel.


Version:

Ball thrust pins trivalent passivated.


Ball seat and nuts electro zinc-plated.

Note:

Axial joint suitable for taking up tractive forces. The ball's movement can be controlled or fully locked in position using the clamping nut.

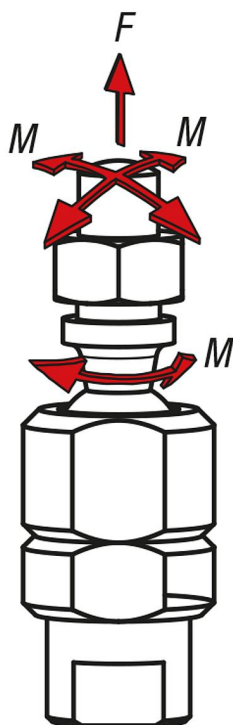

Drawings

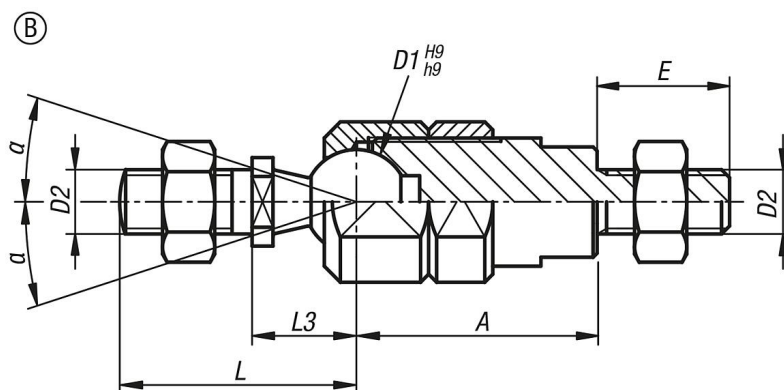

Order No.	style	D1	D2	A	L	L3	E	α	F kN	M Nm	Tightening torque max. Nm
K1936.21006	B	10	M6	21	23,5	11	12	20°	2,5	5,2	12,4

Axial joints for tractive forces adjustable, Style B

Order No.	style	D1	D2	A	L	L3	E	α	F kN	M Nm	Tightening torque max. Nm
K1936.21308	B	13	M8	26	29,5	13	14	24°	5	8,8	13,2
K1936.21610	B	16	M10	35	36	16	16	28°	7,5	14,5	16,4
K1936.21612	B	16	M12	35	36	16	16	28°	7,5	14,5	16,4