

Cam levers, stainless steel with external thread, plastic thrust washer and stainless steel stud - inch

Item description/product images

INCH
Parts



Description

Product description:

These cam levers have a technically optimised plastic thrust washer.

The thrust washer is made of a special high-performance plastic that guarantees very good wear and creep resistance.

Material:

Handle stainless steel 1.4308.

Thrust washer fiberglass reinforced plastic PA 66 GF 35-X.

Hinge pin, screw and washer stainless steel 1.4305.

Version:

Handle electropolished or abrasive blasted.

Thrust washer, black.

Hinge pin and stud bright.

Note:


Plastics are subject to creeping under load (retardation).

Accessory:

For slightly curved contact faces, a stainless steel washer K2130 can also be ordered.

This washer can be mounted between the thrust washer and the contact face.

Drawings

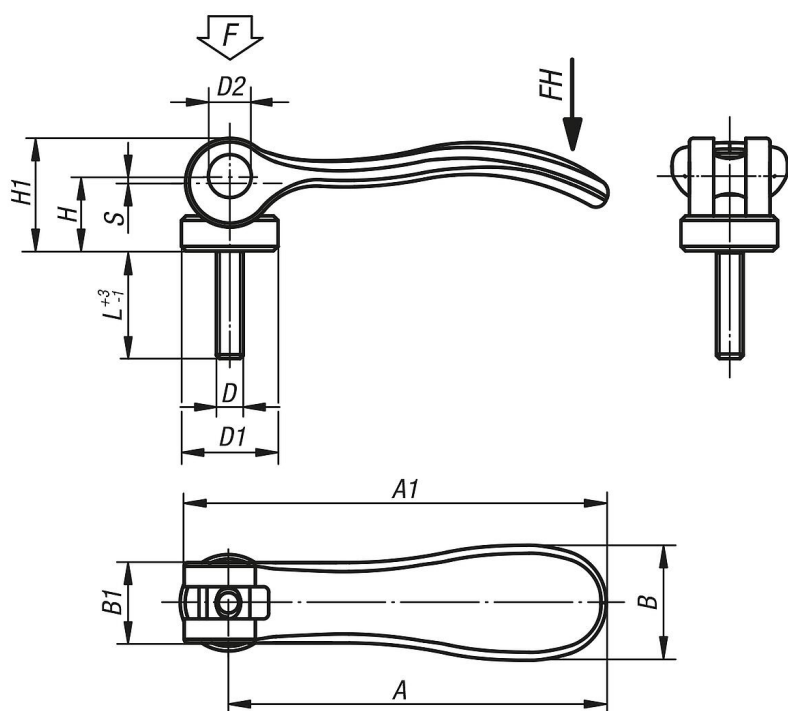

Order No.	Surface finish body	D	D1	D2	B	B1	H	H1	A	A1	L	Travel S	Clamping force F (kN)	Hand force FH N
K2121.95120ADX10	electropolished	6-32	10,7	6	14,4	11,5	9	13,5	36,2	41,7	10	1	1,5	90

Cam levers, stainless steel with external thread, plastic thrust washer and stainless steel stud - inch

Order No.	Surface finish body	D	D1	D2	B	B1	H	H1	A	A1	L	Travel S	Clamping force F (kN)	Hand force FH N
K2121.95120ADX15	electropolished	6-32	10,7	6	14,4	11,5	9	13,5	36,2	41,7	15	1	1,5	90
K2121.95120ADX30	electropolished	6-32	10,7	6	14,4	11,5	9	13,5	36,2	41,7	30	1	1,5	90
K2121.95120AEX10	electropolished	8-32	10,7	6	14,4	11,5	9	13,5	36,2	41,7	10	1	1,5	90
K2121.95120AEX15	electropolished	8-32	10,7	6	14,4	11,5	9	13,5	36,2	41,7	15	1	1,5	90
K2121.95120AEX30	electropolished	8-32	10,7	6	14,4	11,5	9	13,5	36,2	41,7	30	1	1,5	90
K2121.05120AEX15	electropolished	8-32	13,8	8	18	13	11,4	17,2	52,3	59,1	15	1	2,5	100
K2121.05120AEX20	electropolished	8-32	13,8	8	18	13	11,4	17,2	52,3	59,1	20	1	2,5	100
K2121.05120AEX30	electropolished	8-32	13,8	8	18	13	11,4	17,2	52,3	59,1	30	1	2,5	100
K2121.05120A0X20	electropolished	10-24	13,8	8	18	13	11,4	17,2	52,3	59,1	20	1	2,5	100
K2121.05120A0X30	electropolished	10-24	13,8	8	18	13	11,4	17,2	52,3	59,1	30	1	2,5	100
K2121.05120A0X40	electropolished	10-24	13,8	8	18	13	11,4	17,2	52,3	59,1	40	1	2,5	100
K2121.05120A0X50	electropolished	10-24	13,8	8	18	13	11,4	17,2	52,3	59,1	50	1	2,5	100
K2121.05120A1X20	electropolished	10-32	13,8	8	18	13	11,4	17,2	52,3	59,1	20	1	2,5	100
K2121.05120A1X30	electropolished	10-32	13,8	8	18	13	11,4	17,2	52,3	59,1	30	1	2,5	100
K2121.05120A1X40	electropolished	10-32	13,8	8	18	13	11,4	17,2	52,3	59,1	40	1	2,5	100
K2121.05120A1X50	electropolished	10-32	13,8	8	18	13	11,4	17,2	52,3	59,1	50	1	2,5	100
K2121.15120A1X20	electropolished	10-32	16	9	21,5	15	14,7	22,2	70,4	79,2	20	1,2	4	120
K2121.15120A1X30	electropolished	10-32	16	9	21,5	15	14,7	22,2	70,4	79,2	30	1,2	4	120
K2121.15120A1X40	electropolished	10-32	16	9	21,5	15	14,7	22,2	70,4	79,2	40	1,2	4	120
K2121.15120A1X50	electropolished	10-32	16	9	21,5	15	14,7	22,2	70,4	79,2	50	1,2	4	120
K2121.15120A2X20	electropolished	1/4-20	16	9	21,5	15	14,7	22,2	70,4	79,2	20	1,2	4	120
K2121.15120A2X30	electropolished	1/4-20	16	9	21,5	15	14,7	22,2	70,4	79,2	30	1,2	4	120
K2121.15120A2X40	electropolished	1/4-20	16	9	21,5	15	14,7	22,2	70,4	79,2	40	1,2	4	120
K2121.15120A2X50	electropolished	1/4-20	16	9	21,5	15	14,7	22,2	70,4	79,2	50	1,2	4	120
K2121.25120A3X25	electropolished	5/16-18	25	11	33,3	24	18,3	28,8	96	108	25	1,5	8	350
K2121.25120A3X30	electropolished	5/16-18	25	11	33,3	24	18,3	28,8	96	108	30	1,5	8	350
K2121.25120A3X40	electropolished	5/16-18	25	11	33,3	24	18,3	28,8	96	108	40	1,5	8	350
K2121.25120A3X50	electropolished	5/16-18	25	11	33,3	24	18,3	28,8	96	108	50	1,5	8	350
K2121.25120A4X25	electropolished	3/8-16	25	11	33,3	24	18,3	28,8	96	108	25	1,5	8	350
K2121.25120A4X30	electropolished	3/8-16	25	11	33,3	24	18,3	28,8	96	108	30	1,5	8	350
K2121.25120A4X40	electropolished	3/8-16	25	11	33,3	24	18,3	28,8	96	108	40	1,5	8	350
K2121.25120A4X50	electropolished	3/8-16	25	11	33,3	24	18,3	28,8	96	108	50	1,5	8	350
K2121.95413ADX10	blasted	6-32	10,7	6	14,4	11,5	9	13,5	36,2	41,7	10	1	1,5	90
K2121.95413ADX15	blasted	6-32	10,7	6	14,4	11,5	9	13,5	36,2	41,7	15	1	1,5	90
K2121.95413ADX30	blasted	6-32	10,7	6	14,4	11,5	9	13,5	36,2	41,7	30	1	1,5	90
K2121.95413AEX10	blasted	8-32	10,7	6	14,4	11,5	9	13,5	36,2	41,7	10	1	1,5	90
K2121.95413AEX15	blasted	8-32	10,7	6	14,4	11,5	9	13,5	36,2	41,7	15	1	1,5	90
K2121.95413AEX30	blasted	8-32	10,7	6	14,4	11,5	9	13,5	36,2	41,7	30	1	1,5	90
K2121.05413AEX15	blasted	8-32	13,8	8	18	13	11,4	17,2	52,3	59,1	15	1	2,5	100
K2121.05413AEX20	blasted	8-32	13,8	8	18	13	11,4	17,2	52,3	59,1	20	1	2,5	100
K2121.05413AEX30	blasted	8-32	13,8	8	18	13	11,4	17,2	52,3	59,1	30	1	2,5	100
K2121.05413A0X20	blasted	10-24	13,8	8	18	13	11,4	17,2	52,3	59,1	20	1	2,5	100
K2121.05413A0X30	blasted	10-24	13,8	8	18	13	11,4	17,2	52,3	59,1	30	1	2,5	100
K2121.05413A0X40	blasted	10-24	13,8	8	18	13	11,4	17,2	52,3	59,1	40	1	2,5	100
K2121.05413A0X50	blasted	10-24	13,8	8	18	13	11,4	17,2	52,3	59,1	50	1	2,5	100
K2121.05413A1X20	blasted	10-32	13,8	8	18	13	11,4	17,2	52,3	59,1	20	1	2,5	100
K2121.05413A1X30	blasted	10-32	13,8	8	18	13	11,4	17,2	52,3	59,1	30	1	2,5	100
K2121.05413A1X40	blasted	10-32	13,8	8	18	13	11,4	17,2	52,3	59,1	40	1	2,5	100
K2121.05413A1X50	blasted	10-32	13,8	8	18	13	11,4	17,2	52,3	59,1	50	1	2,5	100
K2121.15413A1X20	blasted	10-32	16	9	21,5	15	14,7	22,2	70,4	79,2	20	1,2	4	120
K2121.15413A1X30	blasted	10-32	16	9	21,5	15	14,7	22,2	70,4	79,2	30	1,2	4	120
K2121.15413A1X40	blasted	10-32	16	9	21,5	15	14,7	22,2	70,4	79,2	40	1,2	4	120
K2121.15413A1X50	blasted	10-32	16	9	21,5	15	14,7	22,2	70,4	79,2	50	1,2	4	120
K2121.15413A2X20	blasted	1/4-20	16	9	21,5	15	14,7	22,2	70,4	79,2	20	1,2	4	120
K2121.15413A2X30	blasted	1/4-20	16	9	21,5	15	14,7	22,2	70,4	79,2	30	1,2	4	120
K2121.15413A2X40	blasted	1/4-20	16	9	21,5	15	14,7	22,2	70,4	79,2	40	1,2	4	120
K2121.15413A2X50	blasted	1/4-20	16	9	21,5	15	14,7	22,2	70,4	79,2	50	1,2	4	120
K2121.25413A3X25	blasted	5/16-18	25	11	33,3	24	18,3	28,8	96	108	25	1,5	8	350
K2121.25413A3X30	blasted	5/16-18	25	11	33,3	24	18,3	28,8	96	108	30	1,5	8	350
K2121.25413A3X40	blasted	5/16-18	25	11	33,3	24	18,3	28,8	96	108	40	1,5	8	350
K2121.25413A3X50	blasted	5/16-18	25	11	33,3	24	18,3	28,8	96	108	50	1,5	8	350
K2121.25413A4X25	blasted	3/8-16	25	11	33,3	24	18,3	28,8	96	108	25	1,5	8	350

Cam levers, stainless steel with external thread, plastic thrust washer and stainless steel stud - inch

Order No.	Surface finish body	D	D1	D2	B	B1	H	H1	A	A1	L	Travel S	Clamping force F (kN)	Hand force FH N
K2121.25413A4X30	blasted	3/8-16	25	11	33,3	24	18,3	28,8	96	108	30	1,5	8	350
K2121.25413A4X40	blasted	3/8-16	25	11	33,3	24	18,3	28,8	96	108	40	1,5	8	350
K2121.25413A4X50	blasted	3/8-16	25	11	33,3	24	18,3	28,8	96	108	50	1,5	8	350