

Cam levers, steel with external thread, plastic thrust washer and steel stud - inch

Item description/product images

INCH
Parts



Description

Product description:

These cam levers have a technically optimised plastic thrust washer.

The thrust washer is made of a special high-performance plastic that guarantees very good wear and creep resistance.

Material:

Handle steel 1.0401.

Thrust washer high performance, carbon-fibre reinforced thermoplastic.

Hinge pin stainless steel 1.4305 (AISI 303 equivalent).

Stud steel, grade 5.8.

Version:

Handle and stud blue passivated.

Thrust washer, black.

Hinge pin bright.

Note:


Plastics are subject to creeping under load (retardation).

Accessory:

For slightly curved contact faces, a stainless steel washer K2130 can also be ordered.

This washer can be mounted between the thrust washer and the contact face.

Drawings

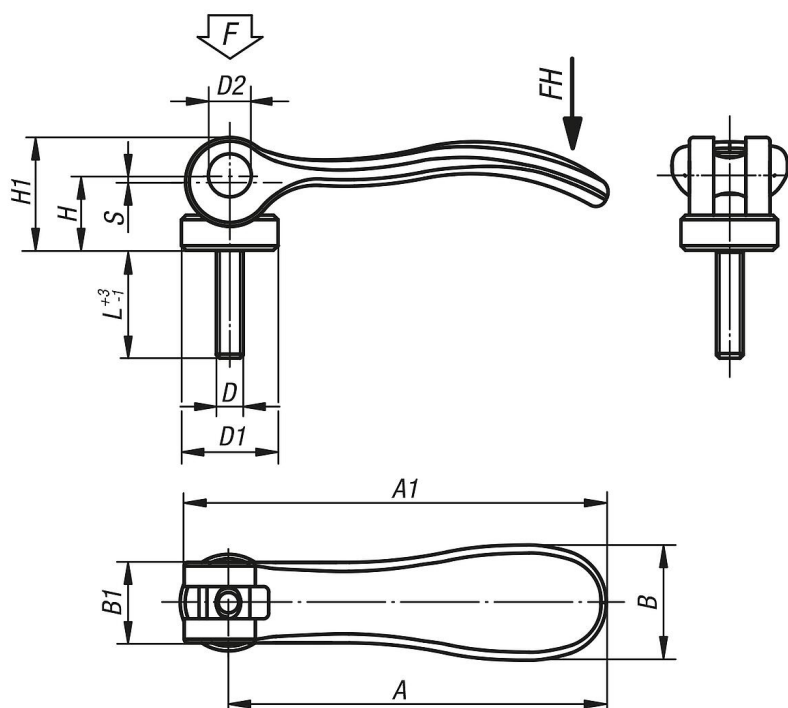

Cam levers, steel with external thread, plastic thrust washer and steel stud - inch

Order No.	D	D1	D2	B	B1	H	H1	A	A1	L	Clamping force F (kN)	Hand force FH N	Travel S
K2123.15022A1X20	10-32	16	9	21,5	15	14,7	22,2	70,4	79,2	20	4	120	1,2
K2123.15022A1X30	10-32	16	9	21,5	15	14,7	22,2	70,4	79,2	30	4	120	1,2
K2123.15022A1X40	10-32	16	9	21,5	15	14,7	22,2	70,4	79,2	40	4	120	1,2
K2123.15022A1X50	10-32	16	9	21,5	15	14,7	22,2	70,4	79,2	50	4	120	1,2
K2123.15022A2X20	1/4-20	16	9	21,5	15	14,7	22,2	70,4	79,2	20	4	120	1,2
K2123.15022A2X30	1/4-20	16	9	21,5	15	14,7	22,2	70,4	79,2	30	4	120	1,2
K2123.15022A2X40	1/4-20	16	9	21,5	15	14,7	22,2	70,4	79,2	40	4	120	1,2
K2123.15022A2X50	1/4-20	16	9	21,5	15	14,7	22,2	70,4	79,2	50	4	120	1,2
K2123.25022A3X25	5/16-18	25	11	33,3	24	18,3	28,8	96	108	25	8	350	1,5
K2123.25022A3X30	5/16-18	25	11	33,3	24	18,3	28,8	96	108	30	8	350	1,5
K2123.25022A3X40	5/16-18	25	11	33,3	24	18,3	28,8	96	108	40	8	350	1,5
K2123.25022A3X50	5/16-18	25	11	33,3	24	18,3	28,8	96	108	50	8	350	1,5
K2123.25022A4X25	3/8-16	25	11	33,3	24	18,3	28,8	96	108	25	8	350	1,5
K2123.25022A4X30	3/8-16	25	11	33,3	24	18,3	28,8	96	108	30	8	350	1,5
K2123.25022A4X40	3/8-16	25	11	33,3	24	18,3	28,8	96	108	40	8	350	1,5
K2123.25022A4X50	3/8-16	25	11	33,3	24	18,3	28,8	96	108	50	8	350	1,5