


Item description/product images

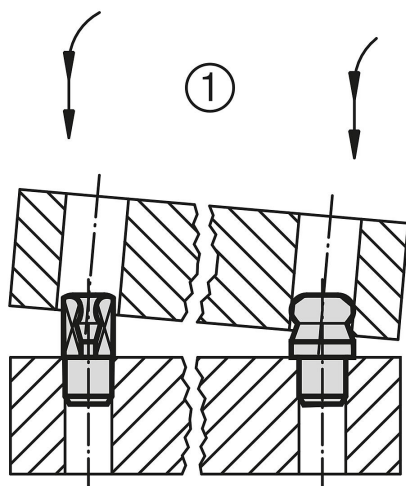

Material:


Version:

Stainless steel ground and kolsterised.

Note:

Ball end locating pins are specially designed to ease the locating process. The tendency to jam, caused by the locating hole not being at right angles to the pin or by the pushing force not being parallel to the pin axis, is minimized by the ball-end style (see illustration 1)

Drawings

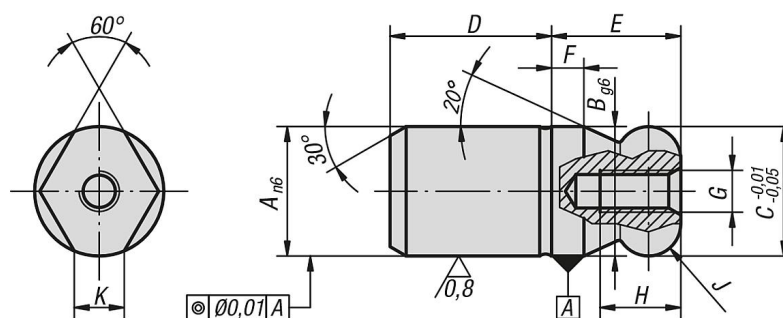

Order No.	Main material	A	B	C	D	E	F	G	H	J	K
K0350.052	tool steel	5	5	5	6	5	2	M2,5	4,5	R 1	1,5
K0350.062	tool steel	6	6	6	8	6	2	M3	5	R 1	1,8
K0350.082	tool steel	8	8	8	10	8	2	M3	6	R 2	1,9
K0350.102	tool steel	10	10	10	13	10	2,5	M3	6	R 2,5	2,5
K0350.122	tool steel	12	12	12	15	12	3	M4	8	R 3	2,5
K0350.142	tool steel	14	14	14	17	14	3,5	M4	8	R 3,5	3,9
K0350.162	tool steel	16	16	16	20	16	4	M5	10	R 4	4,3
K0350.202	tool steel	20	20	20	25	20	5	M5	10	R 5	5
K0350.252	tool steel	25	25	25	25	25	6	M5	10	R 6	5,6

Locating pins with flattened ball-end style C

Order No.	Main material	A	B	C	D	E	F	G	H	J	K
K0350.302	tool steel	30	30	30	30	30	8	M6	12	R 8	8,8
K0350.402	tool steel	40	40	40	40	40	10	M6	12	R 10	12,8
K0350.502	tool steel	50	50	50	50	50	12	M6	12	R 12	16,7
K0350.5052	stainless steel	5	5	5	6	5	2	M2,5	4,5	R 1	1,5
K0350.5062	stainless steel	6	6	6	8	6	2	M3	5	R 1	1,8
K0350.5082	stainless steel	8	8	8	10	8	2	M3	6	R 2	1,9
K0350.5102	stainless steel	10	10	10	13	10	2,5	M3	6	R 2,5	2,5
K0350.5122	stainless steel	12	12	12	15	12	3	M4	8	R 3	2,5
K0350.5142	stainless steel	14	14	14	17	14	3,5	M4	8	R 3,5	3,9
K0350.5162	stainless steel	16	16	16	20	16	4	M5	10	R 4	4,3
K0350.5202	stainless steel	20	20	20	25	20	5	M5	10	R 5	5