

## Receiver bushes for ball lifting pins, stainless steel

### Item description/product images




### Description

#### Version:


Hardened.

#### Note:

The locating bushings enable secure and quick locating possibilities for lifting pins. They offer easy and reliable installation in a variety of carrier materials. Can also be used in thin-walled materials and blind holes. They are corrosion-resistant with low wear.

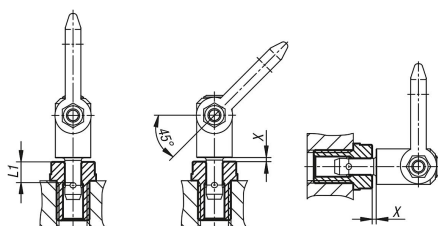

### Drawings

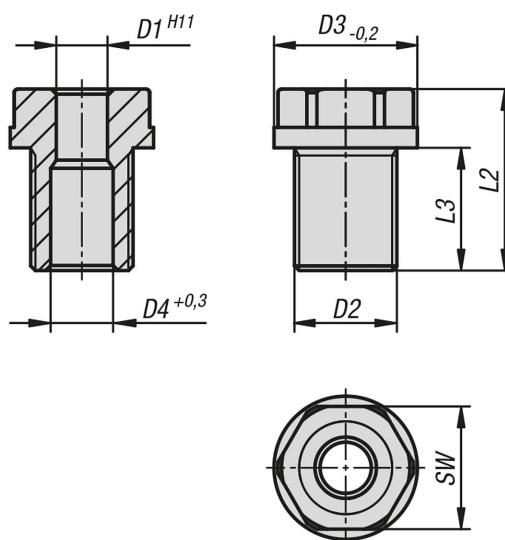

## Receiver bushes for ball lifting pins, stainless steel

### Receiver bushings for ball lifting pins, stainless steel

| Order No.  | D1 | D2      | D3 | D4   | L1 | L2   | L3 | X   | SW | Tightening torque<br>Nm |
|------------|----|---------|----|------|----|------|----|-----|----|-------------------------|
| K1922.0810 | 8  | M16x1,5 | 24 | 9,8  | 10 | 27,5 | 20 | 1,5 | 19 | 90                      |
| K1922.0815 | 8  | M16x1,5 | 24 | 9,8  | 15 | 27,5 | 20 | 1,5 | 19 | 90                      |
| K1922.0825 | 8  | M16     | 24 | 9,8  | 25 | 37,5 | 25 | 1,5 | 19 | 75                      |
| K1922.0835 | 8  | M16     | 24 | 9,8  | 35 | 47,5 | 35 | 1,5 | 19 | 75                      |
| K1922.1015 | 10 | M20x1,5 | 28 | 12,2 | 15 | 35,5 | 24 | 1,5 | 24 | 145                     |
| K1922.1025 | 10 | M20x1,5 | 28 | 12,2 | 25 | 35,5 | 24 | 1,5 | 24 | 145                     |
| K1922.1035 | 10 | M20     | 28 | 12,2 | 35 | 46   | 29 | 1,5 | 24 | 130                     |
| K1922.1050 | 10 | M20     | 28 | 12,2 | 50 | 65   | 49 | 1,5 | 24 | 130                     |
| K1922.1215 | 12 | M24x1,5 | 32 | 14,7 | 15 | 35,5 | 24 | 1,5 | 27 | 220                     |
| K1922.1225 | 12 | M24x1,5 | 32 | 14,7 | 25 | 36,5 | 24 | 1,5 | 27 | 220                     |
| K1922.1235 | 12 | M24     | 32 | 14,7 | 35 | 48,5 | 36 | 1,5 | 27 | 200                     |
| K1922.1250 | 12 | M24     | 32 | 14,7 | 50 | 72,5 | 60 | 1,5 | 27 | 200                     |
| K1922.1625 | 16 | M30x2   | 39 | 19,2 | 25 | 44   | 29 | 1,5 | 30 | 440                     |
| K1922.1650 | 16 | M30     | 39 | 19,2 | 50 | 66   | 44 | 1,5 | 30 | 400                     |
| K1922.1675 | 16 | M30     | 39 | 19,2 | 75 | 96   | 74 | 1,5 | 30 | 400                     |
| K1922.2050 | 20 | M36x2   | 43 | 26   | 50 | 70   | 55 | 1,5 | 36 | 440                     |
| K1922.2075 | 20 | M36x2   | 43 | 26   | 75 | 95   | 80 | 1,5 | 36 | 440                     |