

Cam levers, stainless steel with internal thread, plastic thrust washer - inch

Item description/product images

INCH
Parts



Description

Product description:

These cam levers have a technically optimised plastic thrust washer.

The thrust washer is made of a special high-performance plastic that guarantees very good wear and creep resistance.

Material:

Handles 1.4308.

Thrust washer plastic PA 66 GF 35-X fibreglass reinforced.

Hinge pin, washer 1.4305.

Version:

Handle electropolished or abrasive blasted.

Thrust washer, black.

Hinge pin bright.

Note:


Plastics are subject to creeping under load (retardation).

Accessory:

For slightly curved contact faces, a stainless steel washer K2130 can also be ordered.

This washer can be mounted between the thrust washer and the contact face.

Drawings

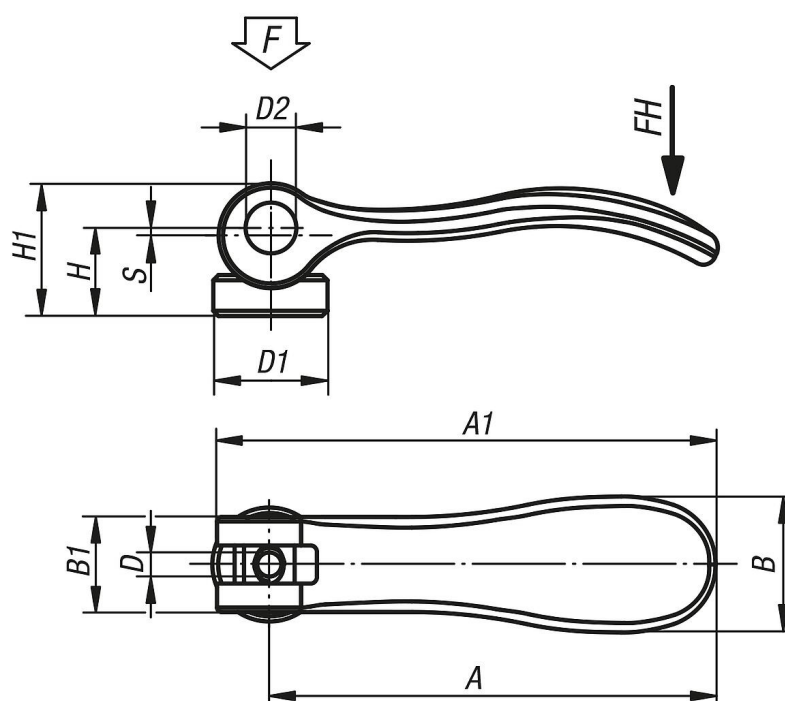

Order No.	Surface finish body	D	D1	D2	B	B1	H	H1	A	A1	Travel S	Clamping force F (kN)	Hand force FH N
K2121.95120AD	electropolished	6-32	10,7	6	14,4	11,5	9	13,5	36,2	41,7	1	1,5	90

Cam levers, stainless steel with internal thread, plastic thrust washer - inch

Order No.	Surface finish body	D	D1	D2	B	B1	H	H1	A	A1	Travel S	Clamping force F (kN)	Hand force FH N
K2121.95120AE	electropolished	8-32	10,7	6	14,4	11,5	9	13,5	36,2	41,7	1	1,5	90
K2121.05120AE	electropolished	8-32	13,8	8	18	13	11,4	17,2	52,3	59,1	1	2,5	100
K2121.05120A0	electropolished	10-24	13,8	8	18	13	11,4	17,2	52,3	59,1	1	2,5	100
K2121.05120A1	electropolished	10-32	13,8	8	18	13	11,4	17,2	52,3	59,1	1	2,5	100
K2121.15120A1	electropolished	10-32	16	9	21,5	15	14,7	22,2	70,4	79,2	1,2	4	120
K2121.15120A2	electropolished	1/4-20	16	9	21,5	15	14,7	22,2	70,4	79,2	1,2	4	120
K2121.25120A3	electropolished	5/16-18	25	11	33,3	24	18,3	28,8	96	108	1,5	8	350
K2121.95123AD	blasted	6-32	10,7	6	14,4	11,5	9	13,5	36,2	41,7	1	1,5	90
K2121.95123AE	blasted	8-32	10,7	6	14,4	11,5	9	13,5	36,2	41,7	1	1,5	90
K2121.05123AE	blasted	8-32	13,8	8	18	13	11,4	17,2	52,3	59,1	1	2,5	100
K2121.05123A0	blasted	10-24	13,8	8	18	13	11,4	17,2	52,3	59,1	1	2,5	100
K2121.05123A1	blasted	10-32	13,8	8	18	13	11,4	17,2	52,3	59,1	1	2,5	100
K2121.15123A1	blasted	10-32	16	9	21,5	15	14,7	22,2	70,4	79,2	1,2	4	120
K2121.15123A2	blasted	1/4-20	16	9	21,5	15	14,7	22,2	70,4	79,2	1,2	4	120
K2121.25123A3	blasted	5/16-18	25	11	33,3	24	18,3	28,8	96	108	1,5	8	350